



Novoferm Side Hinged Garage Doors










Our Story

Novoferm are proud to be a part of the Sanwa Holding Corporation, founded in 1986 and today, considered to be a major global player in the access systems industry.

Sanwa conduct business in 25 countries and regions worldwide with a strong presence in Japan, North America, and Europe.

At Novoferm, we are building a team and giving them the support to achieve our ambitions. We will continue building on the improvements and investments that have already begun to improve lead-time reliability and quality for all our clients.

Our vision is to lead through organic business improvement, investment, digital enablement, and tuck-in acquisitions.

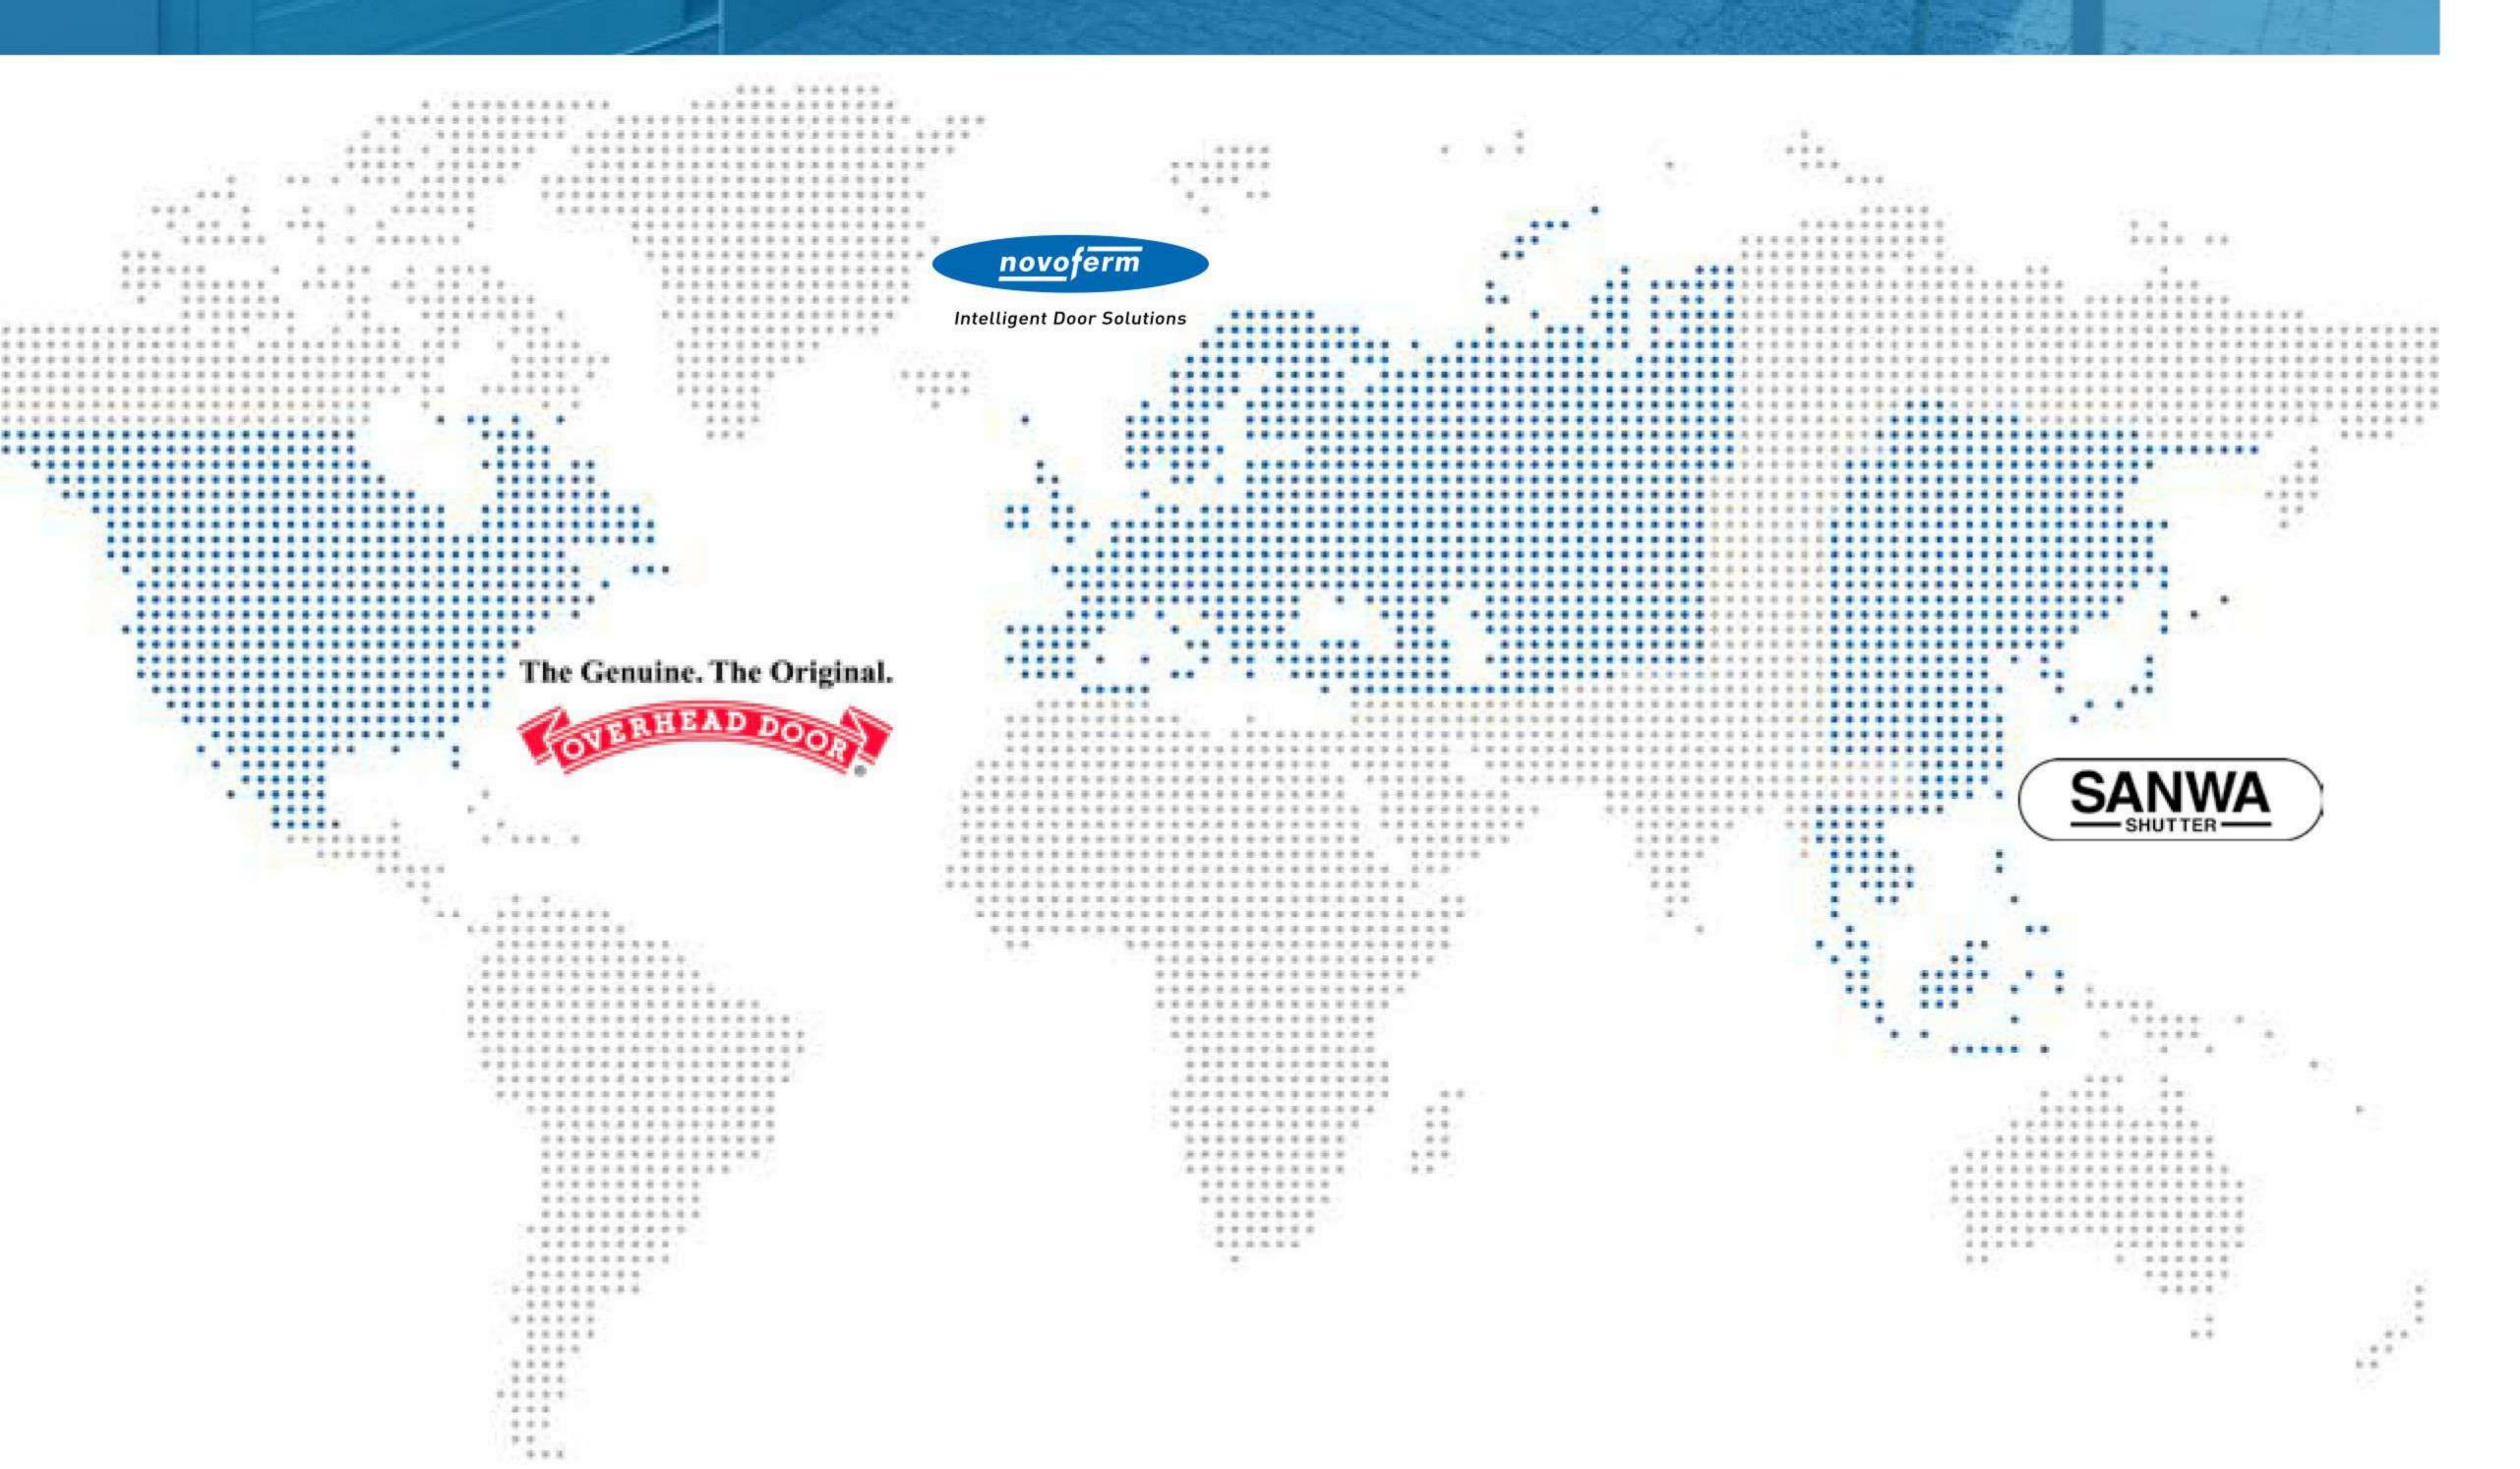

Contents

We'll find the right solution for you and see that it is tailored to your exact requirements. Whether you're building a new garage or renovating an existing one, you'll find that our incredible selection of doors are always the right choice.





Introduction & Benefits 4

Insulated DuoPort® Side Hinged Doors 5-6

Steel Side Hinged Doors 7-9

Timber Side Hinged Doors 10-11

GRP Side Hinged Doors 12-13

Warranty and Maintenance 14


Terms and Conditions 15



Intelligent Door Solutions

Novoferm side hinged doors 3



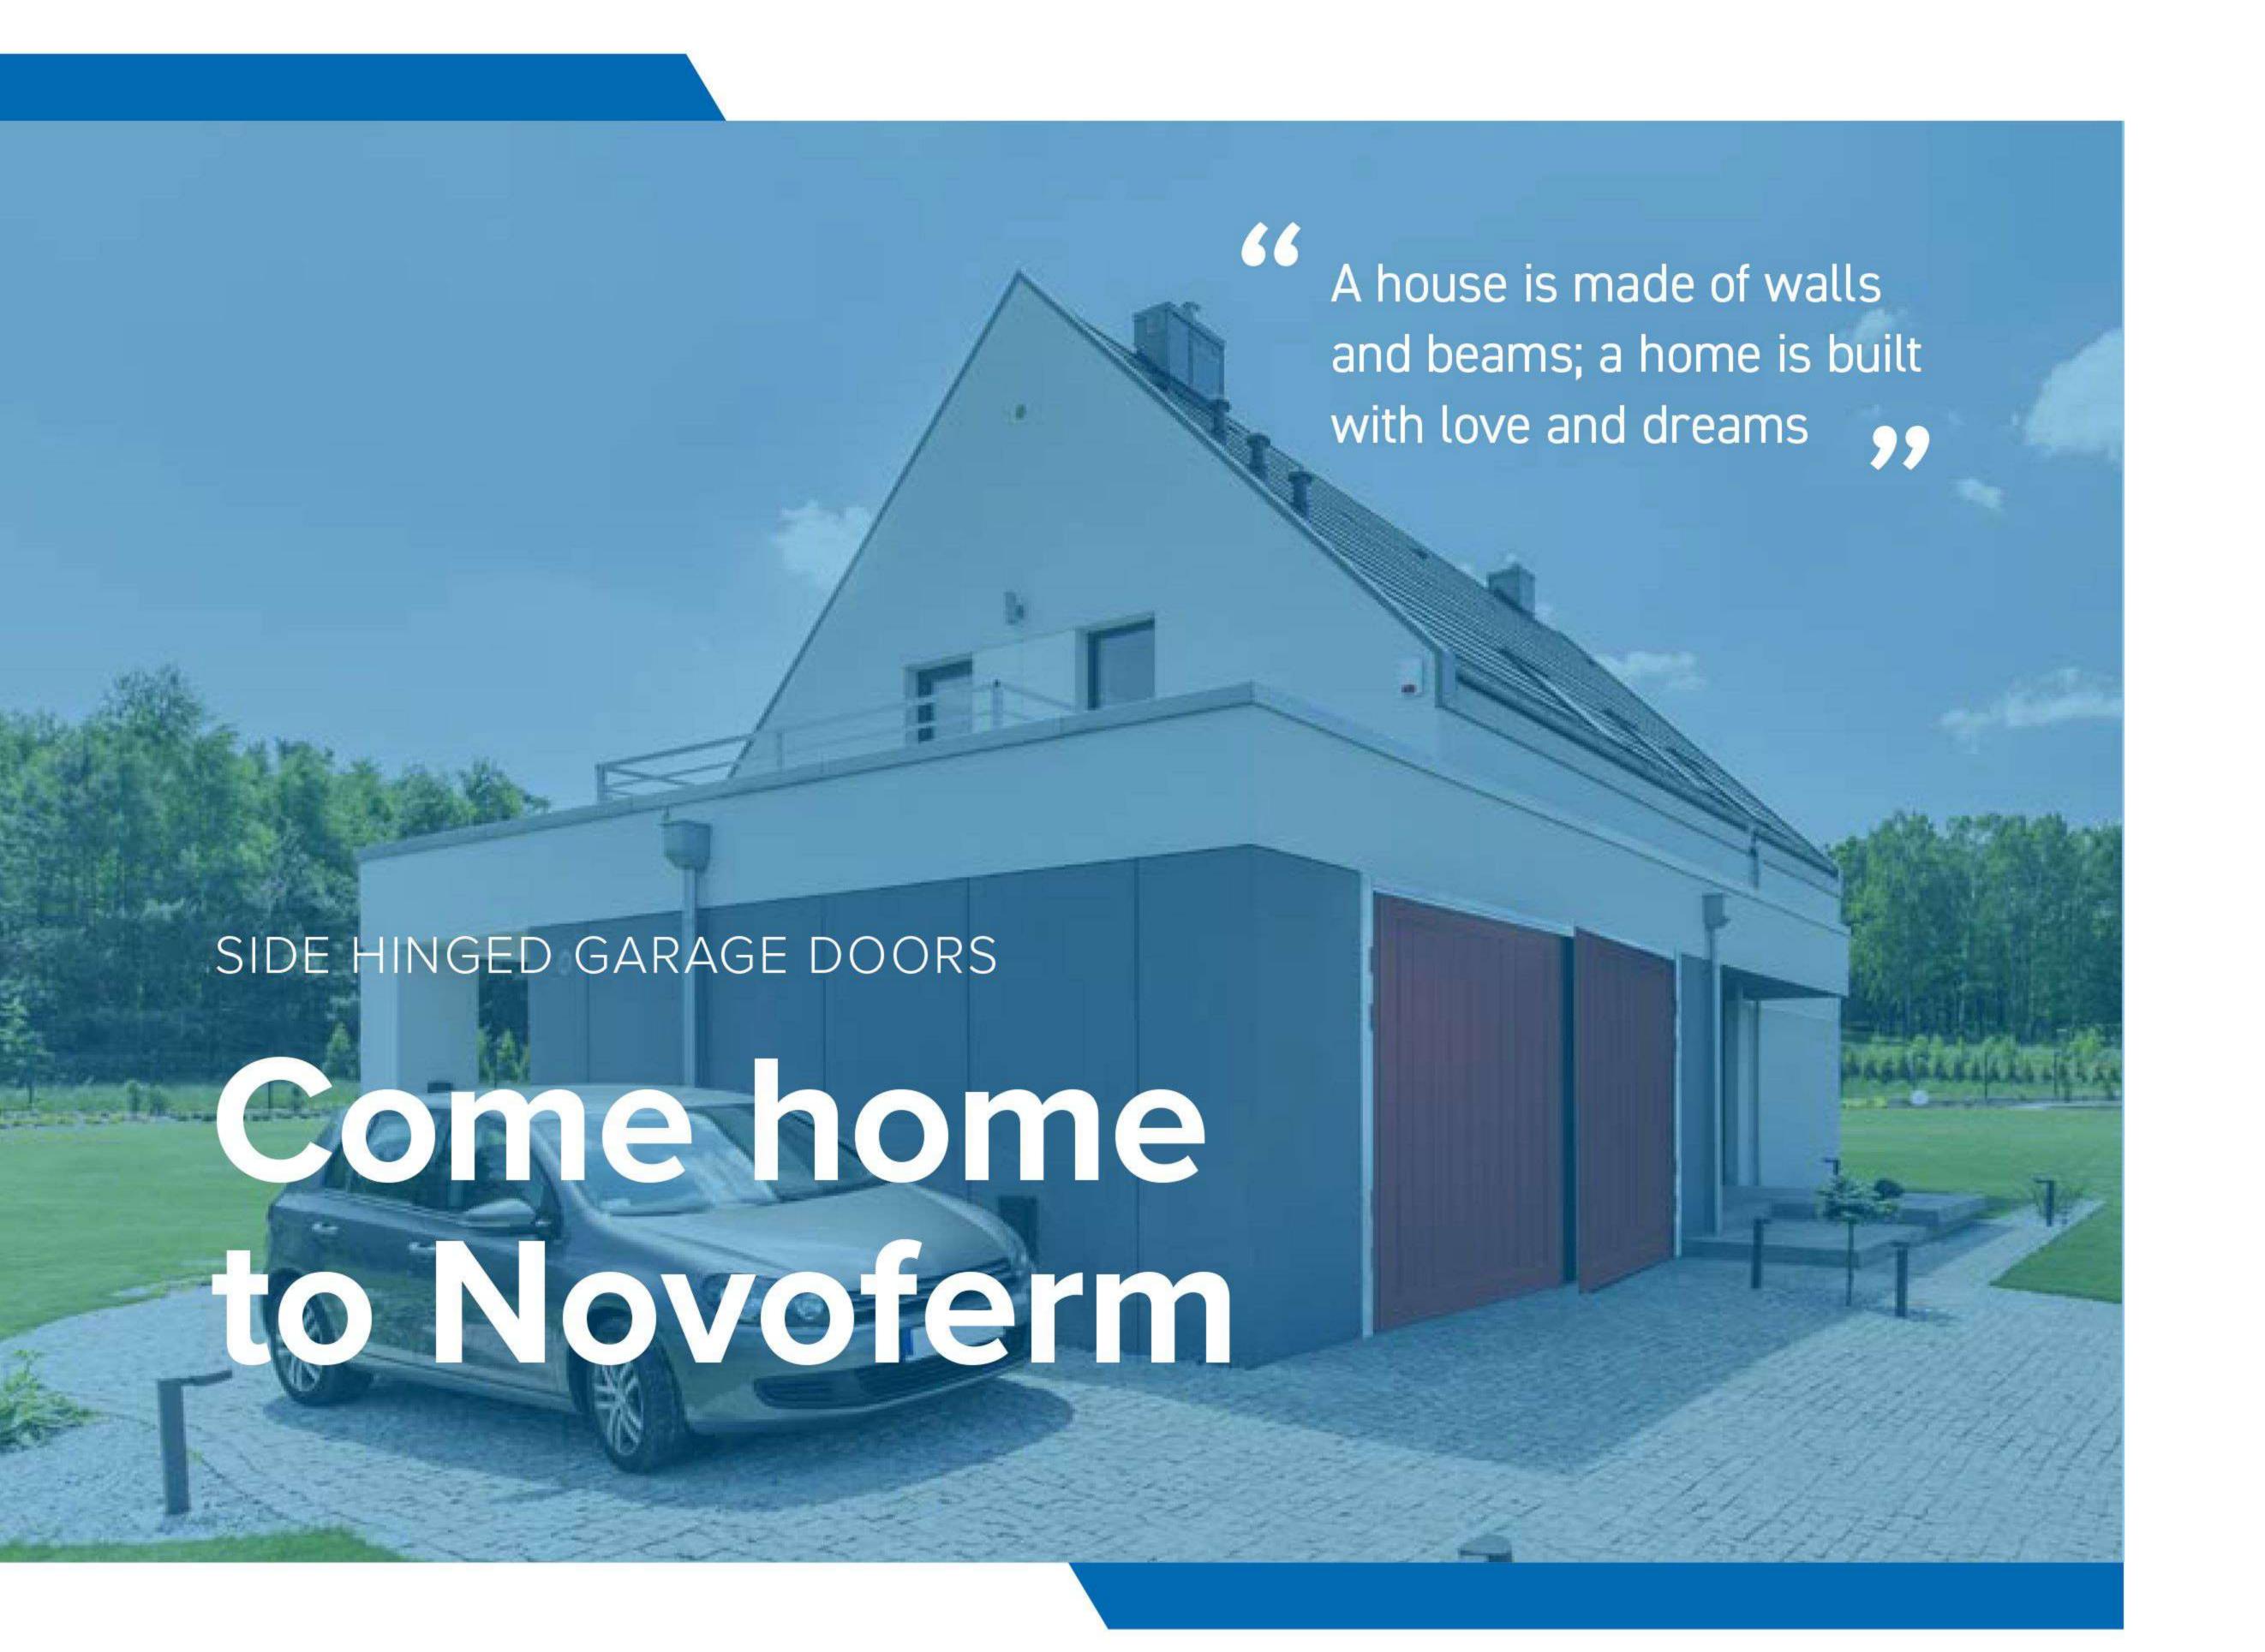

Welcome to our inspirational Side Hinged Garage Door Collection.

Our popular side hinged doors offer a 'traditional' operation and are ideal if there are obstructions within the garage. Excellent security and very durable construction ensures a long and trouble-free service for your side hinged garage doors.

Discover the benefits of a Novoferm Side Hinged Door

Glazing Options

Various glazing options are available.



Colours/RAL Colours

Our doors are available in an array of eye-catching colours, with options to suit any preference and the period and aesthetics of your home.



Wood Effect/Finishes

Many of our steel doors boast stunning wood effects and finishes, allowing you to enjoy the best of both worlds. Options include golden oak and rosewood finishes.



Insulation

Novoferm offer a range of insulated DuoPort® leaf doors that have great insulation values keeping your property warm and dry in the winter and cool in the summer.





Insulated DuoPort® Side Hinged Doors






Insulated DuoPort® side hinged doors consist of two doors that open "barn door" style rather than vertically. These doors are available as a 50/50 split with both door leaves of equal size. There's also the choice to have the doors open inwards or outwards. Our Insulated DuoPort® side hinged doors are available in a range of patterns, surfaces, and colours.

Our Insulated DuoPort® leaf doors offer you the possibility to use your garage as a utility room, for leisure time or hobbies.

You can choose whether to open both doors or just the active





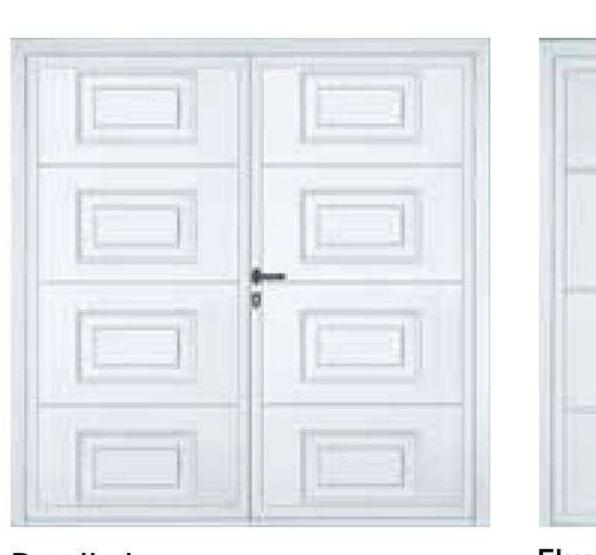



Horizontal Rib

Large Rib

Panelled

Flush

Ideal for private garages

DIMENSIONS minimum DuoPort® door size 1530 w x 1940 h (Over Frame Sizes)

Outstanding Heat Insulation

INSULATED heat insulation is ensured by the 45mm rigid PUR foam core.







MEASURE

Flexible Installation

PRACTICAL block door frame allows flexible installation.

Configurations

FLEXIBLE door leaf either opening outwards or inwards with active and inactive leaves positioned either to the left or right.

Added Security

SECURE 3-point locking with hinge lock is available as an optional extra.

Wide range of Colours

CHOICE OF colours, patterns and surfaces as well as additional fixings such as glazing.

SECURITY LOCKING

NOVOFERM SIDE HINGED DOORS NOVOFERM SIDE HINGED DOORS



Intelligent Door Solutions

Colour

Our DuoPort® side hinged garage doors are available on request in a subtly textured woodgrain effect or in the elegant smooth surface Noblesse, which simply repels dust and moisture.

For further individualisation, you can choose from 12 top-coated, attractively priced Super-Colour colours and nearly all RAL colours iso 45).

INSULATED DUOPORT® SIDE HINGED DOORS



Smooth depending on pattern

Window

Grey

Satin Brown

Shade

RAL 8014




Super-Colour colours


Grey


RAL 9007

Composite

Shade

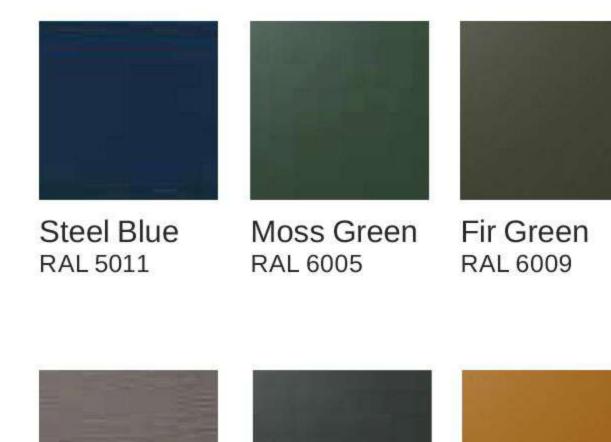





Benefit from our NEW Structural Surfaces

Satin White

RAL 9016

RAL 8001





Window Grey Grey

Our DuoPort® side hinged garage doors are now available in 6 more decorative, top-coated satin matt

structural surfaces with reduced dirt retention and exceptional weather resistance.





Light Grey

RAL 7035







White

Aluminium

RAL 9006


Only available in woodgrain

Rustic Wood effects





Golden Oak







Winchester SMOOTH

Night Oak SMOOTH

Satin Dark

RAL 7016

Microline Pattern



Exclusively for the flush pattern for DuoPort® side hinged garage doors, our popular door profiled finish Microline is available in Satin grey and Satin white. This is a modern, profiled wave structure with a striking and expressive light and shade effect.

RAL 9005

Customers can choose a 50/50 split with both doors of equal size, or an offset configuration, with one smaller personnel door. Our side hinged doors are available in a range of patterns, surfaces, and

Side hinged doors open as per a normal pedestrian door with two

door leaves connected by hinges at the side to the main door frame.

colours, and customers can choose from an array of additional fittings.

All the door leaf frames are made from aluminium, guaranteeing maximum weather-resistance.

The robust hinges will provide long-term opening and closing that is dimensionally accurate. Choose whether to open both of the doors or just the active leaf and choose from a range of customisable fittings to personalise your doors.

Features and Benefits

- Centre overlap to help prevent forced entry and reduce draughts
- → High Security Euro profile mortice lock
- Twin shoot bolts top and bottom for added security
- Stays to prevent the door opening further than 110 degrees
- All side hinged doors are supplied complete with 50mm frame
- Doors open outwards only, with the lock on the right when viewed from the outside
- Left hand opening option available
- Side hinged doors are available in 50/50 split or 2/3rd opening ratio with the exception of the 9 Panel Georgian and Wentworth designs
- Side hinged doors are bespoke and made to order.










SECURITY LOCKING

Steel Side

Hinged Doors



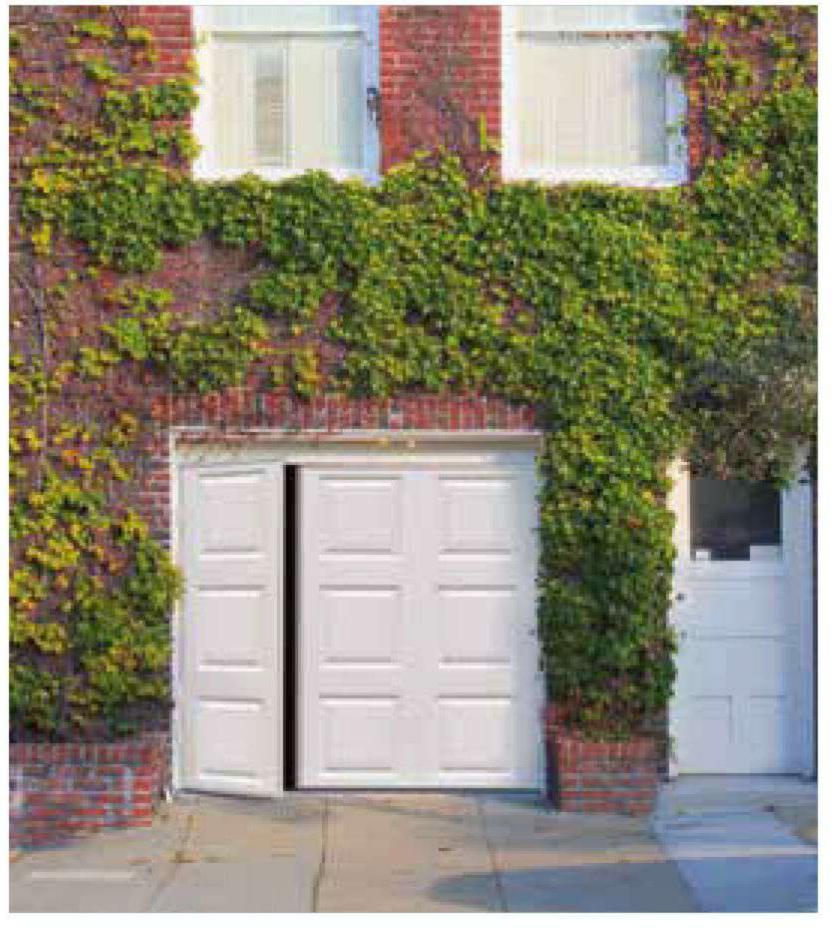

NOVOFERM SIDE HINGED DOORS NOVOFERM SIDE HINGED DOORS

STEEL SIDE HINGED DOORS

Colours & Glazing





Intelligent Door Solutions





Hardware Options Lever Handles available in Black and Brushed Silver

Essential Colours



3 of the best selling stunning textured steel finishes



Anthracite



Signature Range Ral colours available on request

Standard Colours



A choice of 7 stunning textured steel finishes available in our most popular standard colours.



Traffic

White

RAL 9016

Balmoral Chartwell Green


Monarch Red

Conker Brown

Elite Colours



A choice of 6 stunning colours in a textured steel finish available in a brand new exciting colour range for those who want something a little more special!



Oxford Blue

Cherry

Grey

Fir Green


Cream RAL 9001

Premium Finish



Premium grade galvanised steel in woodgrain effect Golden Oak.






All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Garage doors supplied may vary in colour from the brochure representation.

Glazing

Novoferm side hinged doors are available with your choice of glazing options















Berkeley Horizontal

9 Panel Georgian

Vertical



Berkeley Vertical

Regency Glazed

Steel Side

Hinged Doors

Horsham

Regency

NOVOFERM SIDE HINGED DOORS



Intelligent Door Solutions

TIMBER SIDE HINGED DOORS

Colours & Glazing









Timber Colour Options


For south facing situations exposed to strong sunlight the dark colours are not recommended, as they can store excessive heat and dry out. Timber doors are supplied with a basecoat stain as standard. They must be finished immediately after installation.





Light Oak Mahogany





Walnut

Ebony

Timber doors are supplied with a basecoat stain as standard. They must be finished immediately after installation.

Novoferm timber side hinged garage doors are complete with a 50mm frame. Doors are supplied with a lock hole unless specified otherwise.


Doors open outwards only, with the lock on the right when viewed from the outside.




Glazing

Timber side hinged doors are available with your choice of glazing options














Timber Side Hinged Doors







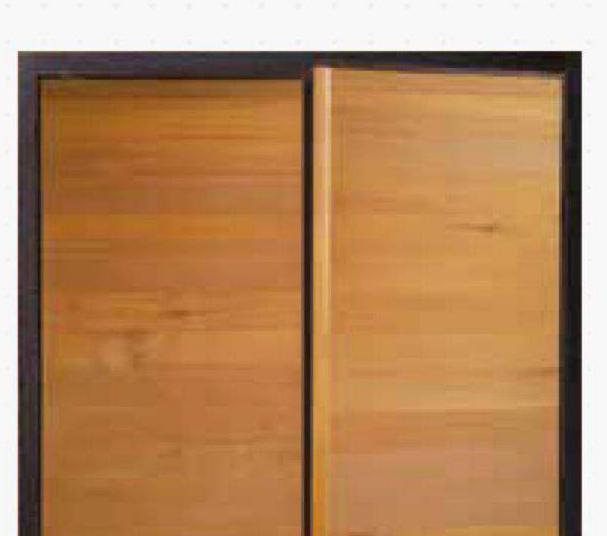








Hertford

Kimberley Square lattice leading - optional extra

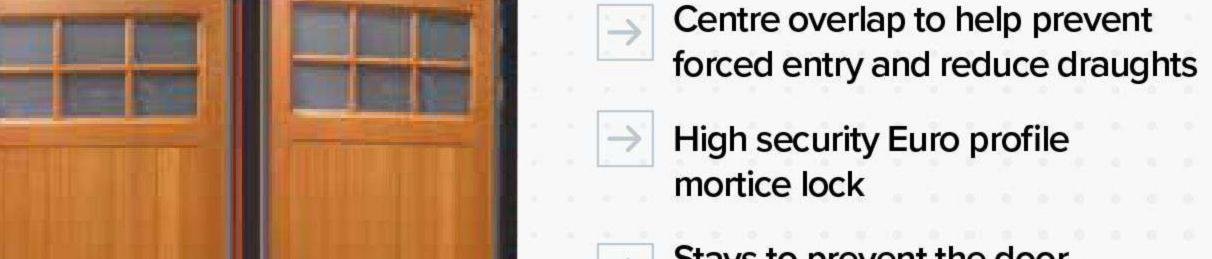

















NOVOFERM SIDE HINGED DOORS



GRP SIDE HINGED DOORS

Colours and Glazing











All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Garage doors supplied may vary in colour from the brochure representation.

Glazing





TRANSPARENT





BLACK

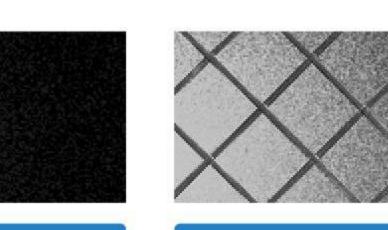

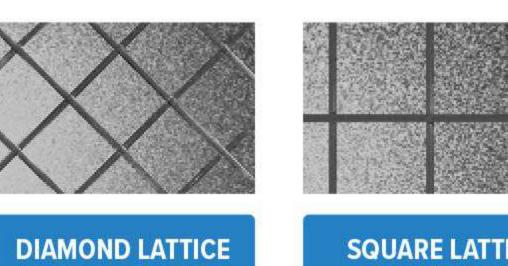







GRP Side Hinged Doors

GRP doors are composed of Glass Reinforced Plastic. They are lightweight, durable, and sturdy.

- Centre Style Between Leaves to **Prevent Forced Entry**
- Weather Seals Between Frame and Leaves for Draught Reduction
- Heavy-Duty Steel Hinges for **Maximum Security**
- Euro Dead Locking Latch and Black Lever Handles as Standard



Virginia Woodgrain | Bleached Oak



Lydbrook Woodgrain | Gloss White



Shildon Woodgrain | Ebony

Hardware Options

Lever Handles available in Black and



Glossop Gloss | Gloss Magnolia



HINGED BESPOKE


GRP SIDE DOORS ARE AND MADE TO ORDER

Brushed Silver

Virginia Glasswood Personnel | Teak



MEASURE



LOCKING

SECURITY

NOVOFERM SIDE HINGED DOORS NOVOFERM SIDE HINGED DOORS



Warranty and Maintenance

Our Promise

During the warranty period, we undertake to rectify any defects to the Novoferm product which can be proven to be attributed to a material or manufacturing defect.

We promise, at our discretion, to either exchange the defective merchandise or repair it.

Replacement parts remain our property.

What is Covered

- 10 Years Safe and Reliable Operation (for use up to 5 open/close cycles per day)
- 10 years Structural Integrity of Door Panels
- 10 years Panel Corrosion
- 10 years On Immovable Frame Parts
- 5 years Paint Finish
- 2 years Movable and Mechanical Parts (including, but not limited to, locking points, door stays, lock mechanism, lock barrel)

Door Finish

Our steel side hung doors are fully finished with powder coat paint. Weathering and sun exposure can cause the finish to fade. We guarantee the finish on doors for five years and that any fading will be minimal and uniform, providing the door is maintained in accordance with the care and maintenance advice. Timber doors are supplied with a basecoat as standard or with an option for fully finished.

Corrosion

Doors situated in 'high corrosive' areas such as within three miles of the sea or a large body of saltwater are not covered for rust or corrosion of steel parts. Cleaning of the doors is especially important in these locations.

Warranty Requirements

This warranty only covers damage to the purchased garage door or garage door operator. You will be required to show

a fully completed warranty service passport (service to be conducted by a qualified engineer annually), together with a receipt

of purchase, which substantiates your right to claim under warranty. The finish on doors is exempt from the service requirements. In the event of a claim, please contact the company that supplied/ installed the doors. They will raise the warranty on your behalf.

For Basecoat timber doors, these must be suitably finished immediately on installation for the guarantee to apply.

During the claims process, a site inspection may be required. For this, we will send an independent assessor. Should this inspection indicate the fault was not caused by a manufacturing defect, you will be liable for the cost of a non-warranty call out. The cost of the call out will be advised prior to the arranged visit.

Novoferm will not accept consequential costs for installation or de-installation, the inspection of parts, transport, and postage costs.

Care and Maintenance

Your door should be kept clean, with any stains removed as soon as possible. You should also ensure that the door does not come into contact with any caustic or acidic substance, which could damage the door surface or structure. Your door should be cleaned thoroughly approximately every 2-3 months (in coastal areas or areas close to large bodies of saltwater, this should be done weekly) using warm water and a soft cloth or sponge. Allow the door to dry naturally. Never use detergent, abrasive, caustic, or solvent-based cleaners.

Check moving parts for signs of wear. If any wear is detected, arrange for these to be replaced as soon as possible (failure to replace these parts can invalidate your warranty).

What is not Covered?

- Improper installation, negligent care and maintenance - doors that have not been maintained or had annual maintenance/ servicing
- Improper initial and subsequent operation
- Negligent or wanton destruction
- External influences, such as fire, water, salts, alkaline solutions, acids, and any abnormal environmental influences, sunlight

- Mechanical damage, through improper transport and fitting, or through falling or hitting objects
- Repair by non-qualified persons
- Using non-Novoferm parts without the written approval of the manufacturer
- Removal of the product number, or making it unidentifiable
- Application of additional, non-approved weights or infills
- Failure to remove the protective film or packaging provided with the product, where applicable
- Failures caused by extreme or abnormal weather conditions

Visual Standards Check

Visual standards checks must be carried out prior to a warranty submission. This check should be carried out in natural daylight, not direct sunlight, standing at a distance of 3m from the door to view the overall appearance. Doors are acceptable if the following are not readily visible on the face of the door:

- Marks or distortion associated with the manufacturing process
- Minor indentations, marks, or scuffs on the surface
- Paint or stain blemishes

Full full details on our warranty and maintance, please visit www.novoferm. co.uk/installation-warranty-and-maintenance-details/

Terms and Conditions

Warranty

In the unlikely event of a warranty claim becoming necessary please contact the dealer or distributor who supplied the door.

To enable your claim to be processed without delay you should provide the following information:

- Your name, address and contact telephone number
- The original invoice and date of purchase
- A description of the door, the door type and the product number
- A description of the reason for the claim

Your dealer will then supply details of your claim, together with a copy of the warranty card supplied with the door and proof of purchase, to the warranty department at Novoferm UK

An assessment of the claim will be made. This may mean Novoferm will need to come and inspect your door at your premises.

In the event that there is no legitimate claim under the terms of the warranty you will be liable for the costs of this visit. It is essential that you take note of the care and maintenance instructions provided with your door and you follow these instructions throughout the lifetime of your door. It is essential that you take note of the care and maintenance instructions provided with your door and you follow these instructions throughout the lifetime of your door.

The warranty does not cover:

- Improper installation
- Normal wear and tear
- Priming and other surface protection treatments
- Negligent or wanton destruction
- Incorrect or too late applied surface protection treatments
- Repair by a non-qualified installer
- Use of non-Novoferm parts without the approval of Novoferm
- Damage or removal of the product number or making it unidentifiable
- Improper operation
- External influences, such as fire, salts, water, sun, alkaline solutions, abnormal environmental influences
- Mechanical damage caused by improper transport or installation

All dark colours which are exposed to direct sunlight should be avoided. Dark coloured doors may undergo expansion due to heat absorption. Such instances are not covered by the guarantee, however normal performance will revert when the door has cooled down if the heat absorption has affected the door's performance.

All colour samples depicted in this brochure are as close to the original manufacturer's colours as possible. Garage doors supplied may vary in colour from the brochure representation.

Prices

All orders are accepted on the understanding that the goods will be subject to the prices ruling at the time of delivery, unless other terms are specifically agreed. All prices are in £ sterling and exclude VAT.

- A 25% handling charge applies to all unwanted items on standard stock items only. Items must be returned unopened and in an unused condition.
- All returns are subject to acceptance by Novoferm UK Limited.

Specification

Due to the progressive outlook of the Novoferm Group we reserve the right to alter specifications to design and manufacture without notification. All specifications and details are correct at the time of publication, errors and omissions excepted.

All Doors

Colour match Pairs of doors should be ordered together to obtain the best colour match, bearing in mind the limitations of the materials used in the construction. Timber garage doors cannot be ordered as matching sets.

Size variations As the size of a door changes in height and/or width, the panel frequency and profile can change, therefore doors of the same style but of different sizes can be significantly different in appearance.

Clearances All doors require operating clearances, i.e. the gap between the door panel and frame opening, these are inbuilt during manufacture and should not be reduced by means of infills, or draught-proofing.

Right to Cancel

Any bespoke product which is made to measure/customised, is exempt of any cancellation rights.

novoferm side hinged doors 15



Your Novoferm Stockist



Intelligent Door Solutions







Opening times

8.30am - 5.00pm Monday to Friday

Novoferm UK Unit 5 - 9 North Luton Industrial Estate Sedgwick Road Luton LU4 9DT E: customerservice@novoferm.co.uk www.novoferm.co.uk